



ALPINE Series

Half-Cell Bifacial Module


595-610Wp | **21.55%**
Module Power Output | Max Efficiency



Key Features

-  High module conversion efficiency
-  Better temperature coefficient
-  Super multi busbar technology
-  Low attenuation long warranty
-  Superior load capacity
-  Higher bifacially
-  USA based liability insurance
-  Houston, Texas based company



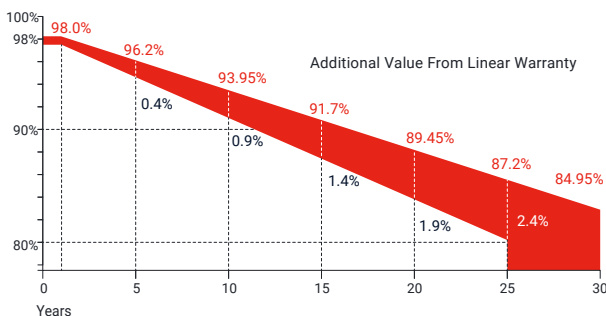




Warranty



15 Years Guarantee on product material and workmanship

30 Years Linear power output warranty

Product Certification

IEC61215:2016; IEC 61730:2016; UL61215; UL61730	
IEC62804	PID
IEC61701	Salt Mist
IEC62716	Ammonia Resistance
IEC60068	Dust and Sand
IEC61215	Hailstone
Fire Type (UL61730): Type 29	
ISO14001:2015; ISO9001:2015; ISO45001:2018	
	
	
	
	

About SEG Solar

Founded in 2016, SEG is a leading vertically integrated PV manufacturer headquartered in Houston, Texas, U.S., and is dedicated to delivering reliable and cost-effective solar modules to the utility, commercial and residential markets. By the end of 2023, SEG has shipped over 5 GW of solar modules worldwide. The company is expected to exceed a production capacity of 5.5 GW by the end of 2024.



Download Datasheet

Electrical Characteristics

Module Type	SEG-595-BMB-BG			SEG-600-BMB-BG			SEG-605-BMB-BG			SEG-610-BMB-BG		
	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC
Maximum Power -Pmp(Wp)*	595	446	417	600	450	420	605	454	424	610	458	427
Open Circuit Voltage -Voc(V)	41.49	39.42	41.47	41.69	39.61	41.67	41.89	39.80	41.87	42.09	39.99	42.07
Short Circuit Current -Isc(A)	18.34	14.67	12.84	18.40	14.72	12.88	18.46	14.77	12.92	18.52	14.82	12.96
Maximum Power Voltage -Vmp(V)	34.38	32.22	34.37	34.58	32.40	34.56	34.78	32.58	34.75	34.98	32.75	34.94
Maximum Power Current -Imp(A)	17.31	13.85	12.12	17.36	13.89	12.15	17.41	13.93	12.19	17.46	13.97	12.22
Module Efficiency(%)	21.02			21.20			21.38			21.55		
Power Tolerance(W)						(0, +4.99)						
Maximum System Voltage						1500V DC						
Maximum Series Fuse Rating						35 A						
Bifaciality						70±10%						

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

NOCT: Irradiance 800W/m² ambient temperature 20°C module temperature 45°C wind speed: 1m/s




*Measuring tolerance: ±3%

Mechanical Specifications

External Dimension	2172 x 1303 x 33 mm
Weight	35.0 kg
Solar Cells	PERC Mono 210 x 105 mm(120 pcs)
Front Glass	2.0 mm AR coating semi-tempered glass
Back Glass	2.0 mm Semi-tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Connector Type	PV-CO02-xy or MC4
Cable Type	12 AWG PV Wire(UL)
Cable Length	Portrait: 400 mm(+)/ 200 mm(-) Landscape: 1200 mm(+)/ 1200 mm(-) or customized length
Mechanical Load(Front)	5400 Pa / 113 psf*
Mechanical Load(Rear)	2400 Pa / 50 psf*

*Refer to SEG installation manual for details

Technical Drawing

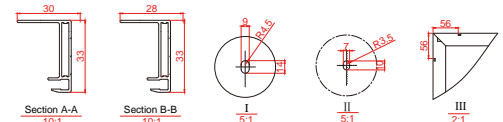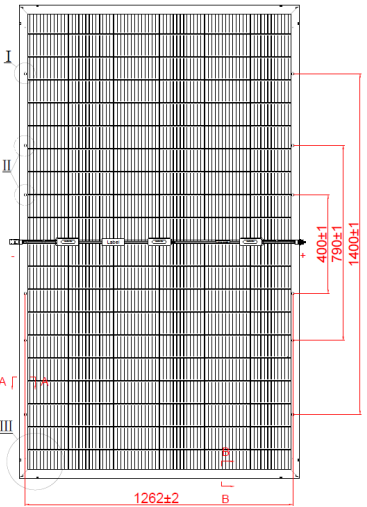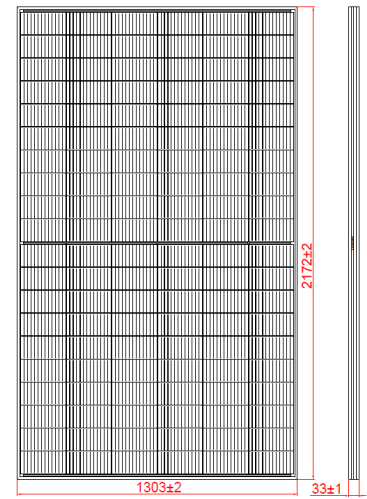

*Refer to SEG installation manual for details

Temperature Characteristics

Pmax Temperature Coefficient	-0.35 %/°C
Voc Temperature Coefficient	-0.27 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature (NOCT)	45±2 °C

Packing Configuration

Container	40'HQ
Pieces per Pallet	31
Pallets per Container	18
Pieces per Container	558

I-V Curve

